



# LZR-i30 SAFETY SENSOR

## ADVANTAGES:

**The entire opening is protected.**

The LZR uses breakthrough technology providing premium safety and activation for the door industry.

The three dimensional presence detection in front of the door allows objects as small as 2" to be detected.

Optional two motion activated push button stations for activation (non contact)

**Mounted in the top corner to reduce the chance of impact**

## SPECIFICATIONS:

*P/N: LZR-i30* as supplied by Service Door Industries

Detection range: 30' x 30'


Supply voltage: 10-30VDC

Output: N.O. / N.C.

Degree of Protection: IP65

Temperature range: -30C to +60C

Cable: pre-wired and 30' long

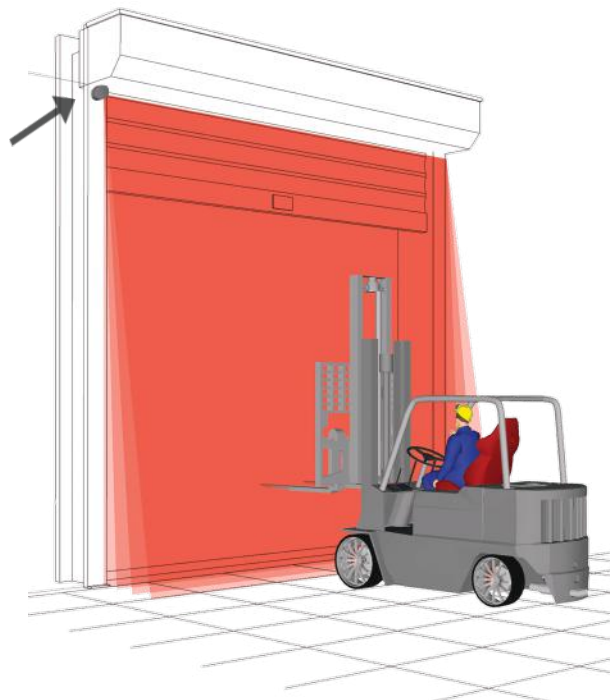

## SERVICE DOOR INDUSTRIES LIMITED

1340 MID-WAY BLVD., MISSISSAUGA,  
ONTARIO, CANADA L5T 2G8  
TEL (905) 670-1200 FAX (905) 670-8830  
COUNTER FAX (905) 670-9931  
sales@servicedoor.com

**servicedoor.com**