



LIGHT CURTAIN SAFETY SENSOR

Advantages

The light curtain uses infrared technology to provide a protective screen area for industrial and commercial doors. If the infrared beams are interrupted by an object or person the door will re-open.

Dynamic blanking function allows the light curtain to distinguish the alarm condition from the proper door opening/closing function.

Specifications

Power supply: 24VDC

Output: N.O. dry contact


Protection rating: IP 67

Operating range: Up to 10m

Easy Installation

Both receiving and transmitting unit are provided with detachable connecting cables for easy installation and alignment.

Synchronization between TX and RX is indicated by LED's.

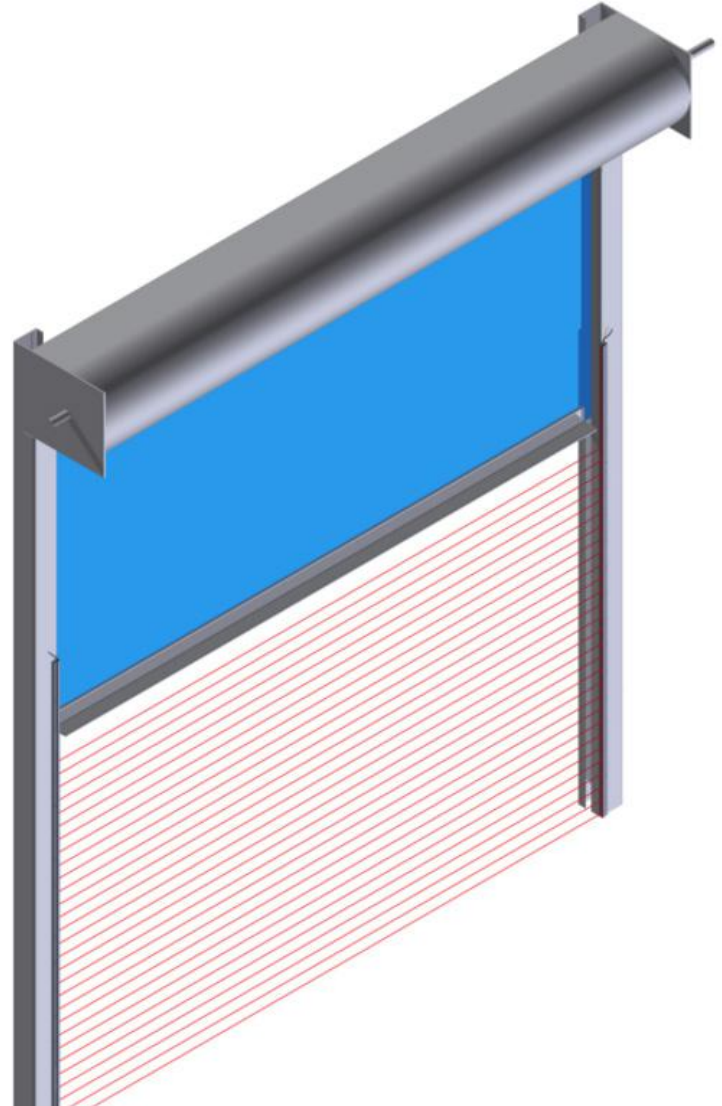

P/N: LC4475 (curtain height 2408mm)

LC4477 (curtain height 2087mm)

LC4482 (curtain height 987mm)

Each part number includes light curtain, cables and power supply.

SERVICE DOOR INDUSTRIES LIMITED
1340 MID-WAY BLVD., MISSISSAUGA, ON, L5T 2G8
TEL (905) 670-1200 FAX (905) 670-8830
COUNTER FAX (905) 670-9931
SALES@SERVICEDOOR.COM

SDI
servicedoor.com